INTERVAL 26MM MODULE MICRO-PRISMATIC 284MM

Ratio

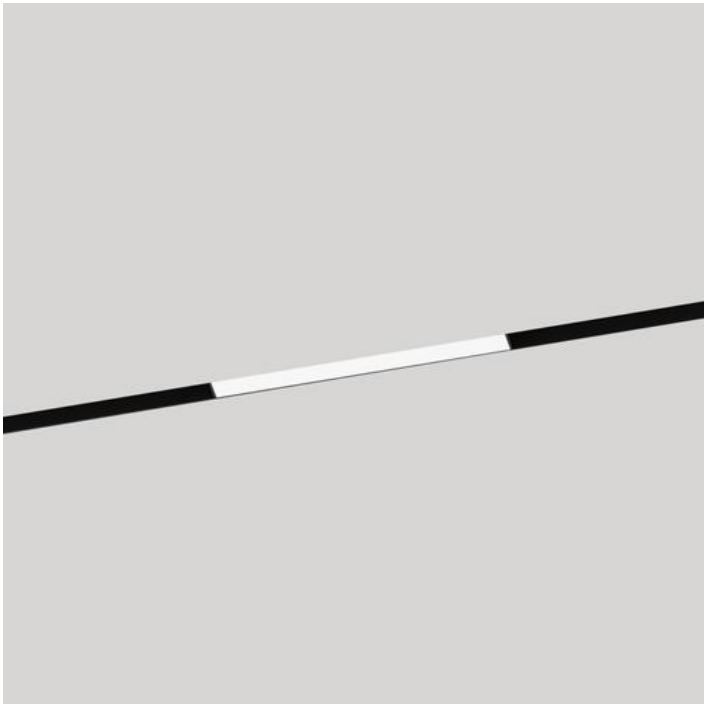

MOUNTING TYPE

SIZE
284mm

CUT OUT

DIMMING
DALI - ON/OFF

LUMEN RANGE
380lm

WATTAGE
7w

INTEGRAL DRIVER

BEAM ANGLE

IP RATING
IP20

COLOUR TEMP
3000k / 4000k

CRI
90

COLOUR
Black