


Tube 60 - In Track Driver

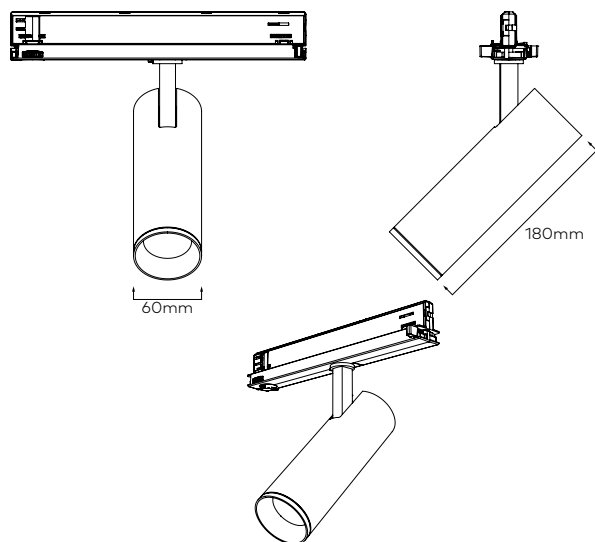

Specification

Bezel	Ø60mm
Length	Tube length : 180mm
Luminaire material	Powder coated aluminium
IP Rating	IP20
Adjustable	350° Horizontal axis and 90° vertical axis

LED Specification

Typical Output (35° / 3000K)	LED Power	System Power	CRI>80	CRI>90
	9W (250mA)	11W	1064lm	905lm
	12W (350mA)	15W	1431lm	1223lm
	16W (450mA)	19W	1676lm	1431lm
	22W (600mA)	25W	2398lm	2031lm
CCT	2700°K, 3000°K, 4000°K			
CRI	>80Ra & >90Ra options			
Optics	15°, 25°, 35°, 50°			
Driver	In Track constant current			
Optional accessories	Honeycomb louvre, solite lens & spread lens			

Ordering Information example 240601L15.12219T4-H

MODEL	FINISH	LED CCT	DRIVER	POWER / CRI	MOUNTING	OPTIONAL ACCESSORIES
240601L15. Spot 15°	1 White	2 2700°K	1 Non-dimming	11 11W CRI >80	T4 Multi circuit track	-H Honeycomb Louvre
240601L25. Narrow 25°	2 Black	3 3000°K	2 Phase dimming	11C 11W CRI >90	T6 Multi circuit data bus track	-SO Solite Lens
240601L35. Medium 35°		4 4000°K	4 DALI Dimming ⁽ⁱ⁾	15 15W CRI >80		-SL Spread Lens
240601L50. Wide 50°				15C 15W CRI >90		
				19 19W CRI >80		
				19C 19W CRI >90		
				25 25W CRI >80		
				25C 25W CRI >90		