


## Cone 60

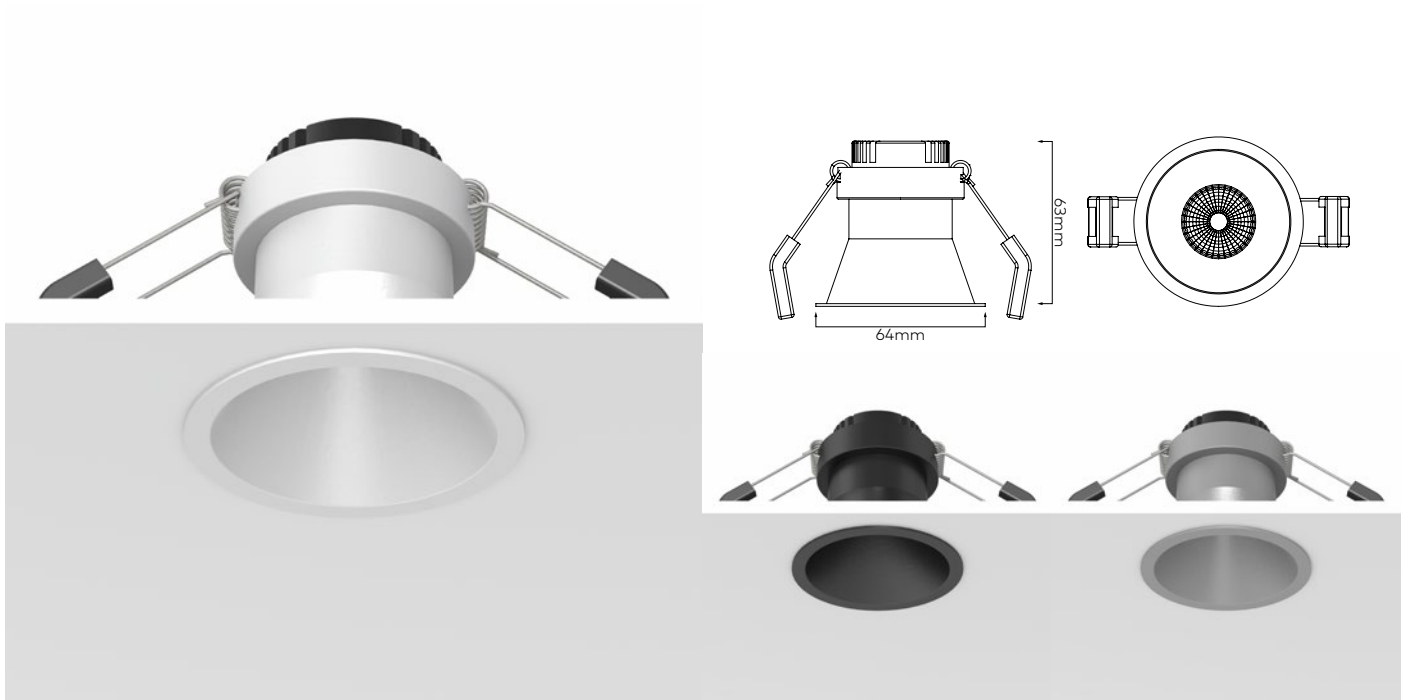

## Features

- Energy saving
- Full intensity from switch on
- Interchangeable LED engine
- Wide range of LED CCTs, optics and accessories
- CREE 2 step McAdam LEDs
- CRI >95 available on request
- Long life L70 50,000 hrs based on LM-80 & TM-21 applicable test data
- Remote constant current driver with S.E.L.V. output
- Mains phase, 0-10V and DALI dimming options available
- 5 Year warranty

## Luminaire Specification

<b>Height</b>	63mm
<b>Bezel</b>	Ø64mm
<b>Hole cut-out</b>	Ø57mm
<b>Luminaire material</b>	Aluminium with textured powder coat finish.
<b>IP Rating</b>	IP44

## LED Specification

<b>LED</b>	Cree CXB
<b>Typical LED Output <sup>(i)</sup></b>	4.5W : 435lm (96lm/W)
<b>Typical Delivered Output <sup>(ii)</sup></b>	CRI >80 : 415lm, CRI >90 : 352lm
<b>CRI/CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80Ra with >90 option
<b>Optics</b>	Narrow 20°, wide 40°, flood 60°
<b>Drive current</b>	250mA (18V)

Ordering Information example 2824.123A

MODEL	FINISH	LED CCT	DRIVER	VERSION
2822. Narrow 20°	1 White	2 2700K	2 Phase dimming	A5 4.5W CRI >80
2824. Wide 40°	2 Black	3 3000K	3 0-10V Dimming	A5C 4.5W CRI >90
2826. Flood 60°	7 Silver	4 4000K	4 DALI Dimming	