



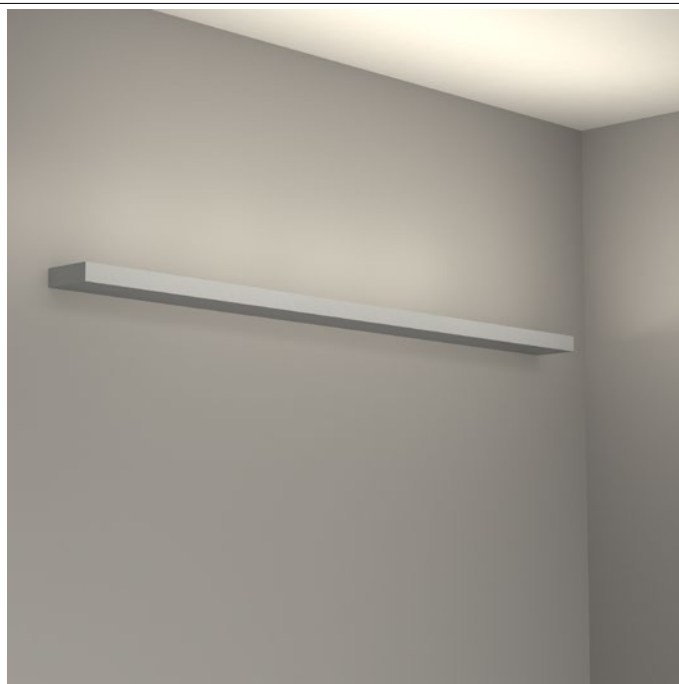

|              |  |      |
|--------------|--|------|
| PROJECT      |  | TYPE |
| SPECIFIER    |  |      |
| DATE         |  |      |
| NOTES        |  |      |
| PRODUCT CODE |  |      |

## LEDGE LARGE

An extruded edge surface mount aluminium profile with LED angled for asymmetric light distribution and concealed frosted slide in diffuser perfect for wall and ceiling washing, surface mounted clips for mechanical fixed installation. Powered with LEDs, with varying lumen outputs and wattages. 90+CRI standard, with a choice of colour temperatures.

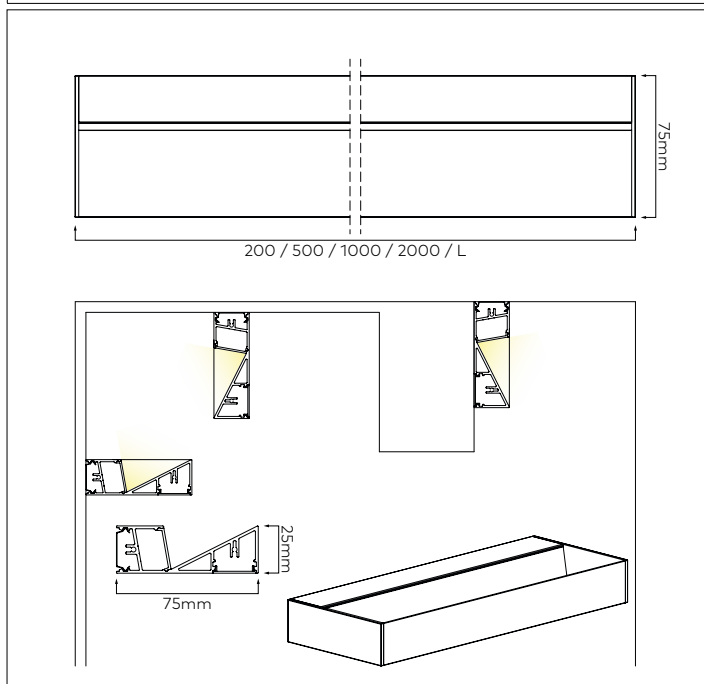

### DIMENSIONS

| DIAMETER | WIDTH | HEIGHT | LENGTH         | CUT OUT |
|----------|-------|--------|----------------|---------|
| -        | 75mm  | 25mm   | As shown above | -       |

### TECHNICAL DATA

|               |                                     |                                 |                                                   |
|---------------|-------------------------------------|---------------------------------|---------------------------------------------------|
| Lamp type     | SMD                                 | Supply voltage                  | 24V DC                                            |
| Lamp wattage  | 9.6 - 25W/m                         | Glow wire resistance            | 960°                                              |
| Lamp life     | 50,000hrs L70                       | LED maintenance                 | LM80 (L70)                                        |
| Binning       | 3-Step MacAdams                     | Mounting surface classification | ▽                                                 |
| CRI           | 90Ra                                | Connection type                 | 500mm Wire tails                                  |
| Control gear  | Remote CV                           | Protection classification       | ⚡                                                 |
| Materials     | Extruded aluminium with PC diffuser | Standards                       | EN/AS/NZS 60598-2-1, 62031, 62471                 |
| Lumen Package | See LED specification table         | Warranty                        | 5 years <i>subject to the Company's T&amp;C's</i> |

### SPECIFICATION

| RANGE  | STYLE | SIZE  | MOUNTING     | TYPE  | DIFFUSER | FINISH                                  | CCT                                                                     | LED POWER / DELIVERED LUMENS <sup>(1)</sup>                                                                                                                                                                                  | LENGTH                                                                                                | DRIVER                                                    |
|--------|-------|-------|--------------|-------|----------|-----------------------------------------|-------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| Linear | Ledge | Large | Surface (SF) | Fixed | Flat (6) | White (1)<br>Black (2)<br>Aluminium (5) | 2400K (C24)<br>2700K (C27)<br>3000K (C30)<br>4000K (C40)<br>6000K (C60) | 9.6W/m 300 LEDs/m (6910) 504lm/m<br>14.4W/m 300 LEDs/m (6914) 774lm/m<br><br>9.6W/m 238 LEDs/m (8710) 597lm/m<br>14.4W/m 238 LEDs/m (8714) 896lm/m<br>19.2W/m 238 LEDs/m (8719) 1194lm/m<br>25W/m 238 LEDs/m (8725) 1555lm/m | 200mm (-0200)<br>500mm (-0500)<br>1000mm (-1000)<br>2000mm (-2000)                                    | Non-Dim (-D1)<br>Phase (-D2)<br>0-10V (-D3)<br>DALI (-D4) |
|        |       |       |              |       |          |                                         | Warm Dim<br>Voltage Reducing<br>2700-1800K<br>(C2718WR)                 | 9.6W/m 324LEDs/m (69B10) 376lm/m<br>14.4W/m 324LEDs/m (69B14) 498lm/m<br>20W/m 324LEDs/m (69B20) 784lm/m                                                                                                                     | (.XXXX)<br>XXXX denotes<br>length in mm<br><br>See cut interval table<br>for custom length<br>options |                                                           |

<sup>(1)</sup>Luminous flux @3000K

### ORDER CODE (Bold above denotes code)

|   |   |   |    |   |   |   |  |  |  |  |
|---|---|---|----|---|---|---|--|--|--|--|
| L | L | L | SF | F | 6 | - |  |  |  |  |
|---|---|---|----|---|---|---|--|--|--|--|