

O	THO	KI •	T •

PROJECT	TYPE
SPECIFIER	
DATE	
NOTES	
PRODUCT CODE	

NIGHT SURFACE LARGE

A surface mount luminaire, with LED angled for asymmetric light distribution, with concealed frosted snap in diffuser, surface mounting clips for mechanical fixed installation. Powered with LEDs, with varying lumen outputs and wattages. 90+CRI standard, with a choice of colour temperatures.

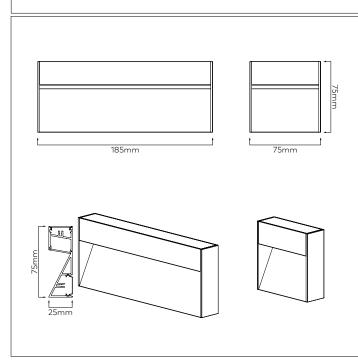

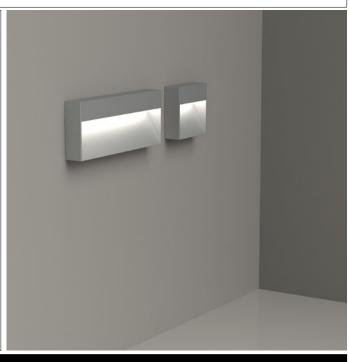

DIAMETER	WIDTH	HEIGHT	LENGTH	CUT OUT
DIAMETER	WIDTH	HEIGHT	LENGTH	CUT OUT
DIMENSIONS				

TECHNICAL DATA			
Lamp type	SMD	Supply voltage	24V DC
Lamp wattage &	0.8W 1.2W 1.6W 2.3W	Glow wire resistance	960°
Delivered lumens ®	3000K	LED maintenance	LM80 (L70)
Lamp life	50,000hrs L70	Mounting surface classification	F
Binning	3-Step MacAdams	Connection type	500mm Wire tails
CRI	90Ra	Protection classification	
Control gear	Remote CV	Standards	EN/AS/NZS 60598-2-2, 62031, 62471
Materials	Extruded aluminium with PC diffuser	Warranty	5 years subject to the Company's T&C's

Uuminous flux @3000K. Please see the full specifications for further photometric data.

SPEC	SPECIFICATION									
RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LENGTH / LED POWER	DRIVER
Accent	N ight	Large	Surface	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60) Warm Dim Voltage Reducing 2700-1800K (C2718WR)	75mm / 0.8W (008-075) 75mm / 1.2W (012-075) 185mm / 1.6W (016-185) 185mm / 2.3W (023-185)	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)

ORDER CODE (Bold above denotes code)									
Α	N	L	s	F	6				

WEBSITE : LIGHTKIT.CO EMAIL : LIGHTKIT@IBL.CO.UK