




PROJECT		TYPE
SPECIFIER		
DATE		
NOTES		
PRODUCT CODE		

## NIGHT SURFACE SMALL

A surface mount luminaire, with LED angled for asymmetric light distribution, with concealed frosted snap in diffuser, surface mounting clips for mechanical fixed installation. Powered with LEDs, with varying lumen outputs and wattages. 90+CRI standard, with a choice of colour temperatures.

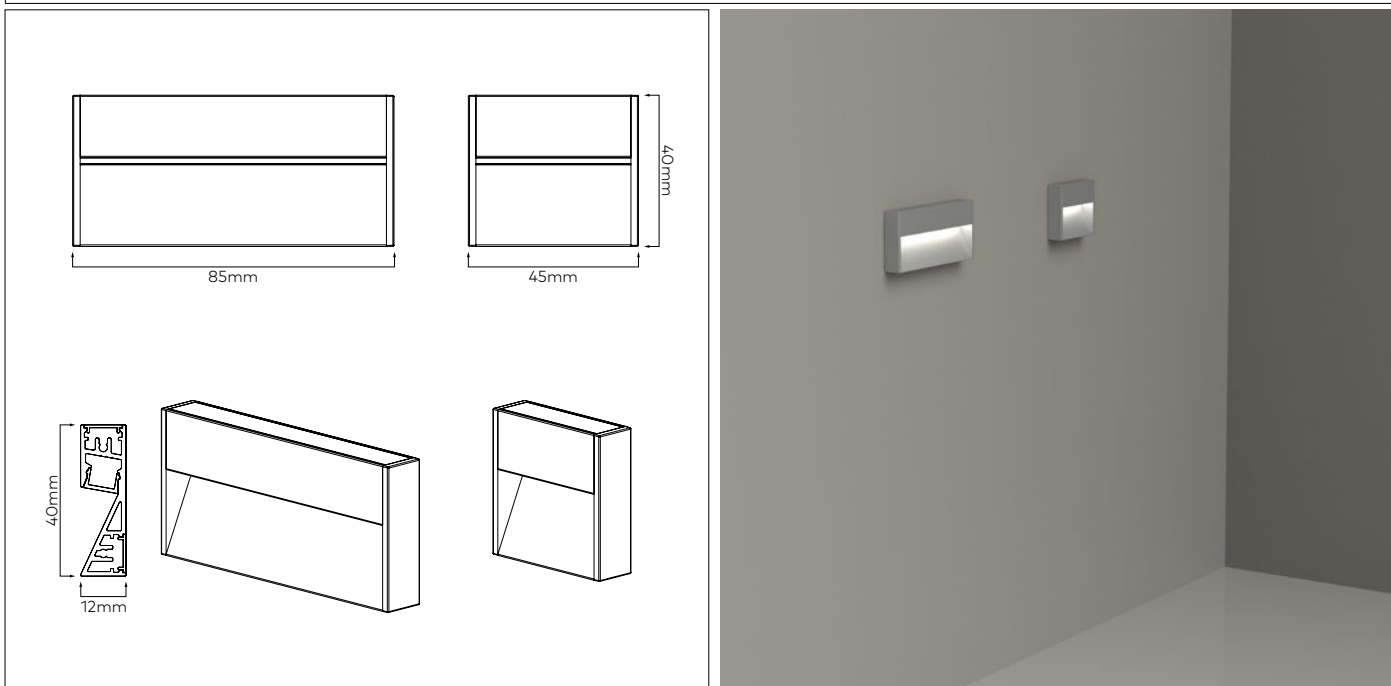

### DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUT OUT
-	40mm	12mm	45mm & 85mm options	-

### TECHNICAL DATA

Lamp type	SMD	Supply voltage	24V DC
Lamp wattage & Delivered lumens <sup>®</sup>	0.4W 22lm	Glow wire resistance	960°
	0.6W 33lm	LED maintenance	LM80 (L70)
	0.8W 41lm		
Lamp life	50,000hrs L70	Mounting surface classification	VF
Binning	3-Step MacAdams	Connection type	500mm Wire tails
CRI	90Ra	Protection classification	III
Control gear	Remote CV	Standards	EN/AS/NZS 60598-2-2, 62031, 62471
Materials	Extruded aluminium with PC diffuser	Warranty	5 years <i>subject to the Company's T&amp;C's</i>

<sup>®</sup> Luminous flux @3000K. Please see the full specifications for further photometric data.

### SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER	FINISH	CCT	LENGTH / LED POWER	DRIVER
Accent	Night	Small	Surface	Fixed	Flat (6)	White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)  Warm Dim Voltage Reducing 2700-1800K (C2718WR)	45mm / 0.4W (004-045) 45mm / 0.6W (006-045)  85mm / 0.8W (008-085) 85mm / 1.2W (012-085)	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)

### ORDER CODE (Bold above denotes code)

A	N	S	S	F	6	-			
---	---	---	---	---	---	---	--	--	--