

Public space

Configurator

CE RoHS IK10
IP67 Protection class III (<18 LED)



Housing

Housing material	ID1, ID2 and ID4 die-cast aluminium (EN44300)
Housing finish	Aluminium
Cover	PMMA

Measurements

Model	LEDs	L1 [mm]	Weight [kg]①
IDstandard	1-2 LEDs	125	0.18
IDstandard	4 LEDs	166	0.23

① max. weight without tube

Electrical

Protection class	II/III
Voltage [V], [Hz]	-
Current feed max. [mA]	500
LED power max. [W]	6.0

Operating conditions


Lifetime	Visit the configurator for specific lifetime options
----------	--

Driver (external) A-Series

Control options	<div>ON OFF DALI 1-10V L/S</div>
Programming [optional]	Constant Lumen Output (CLO) Emergency power supply (AC/DC) Stand-alone
Control accessories	Further accessories on request
Software	connexx light management software for remote management of intelligent luminaire clusters



Precision lens optics

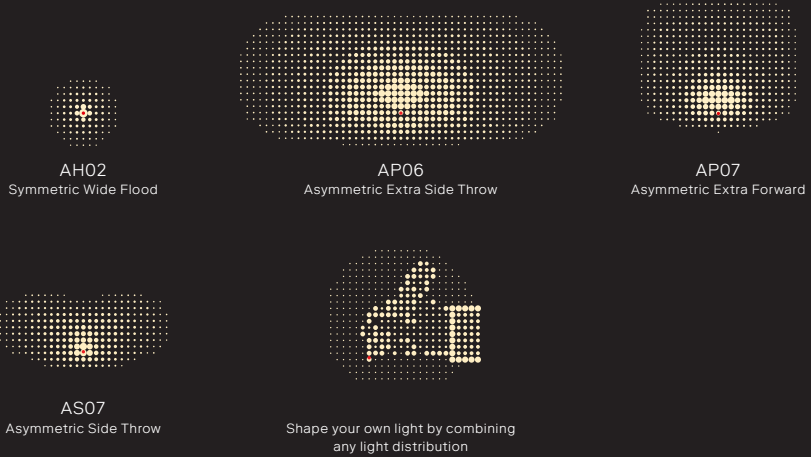

2,200 K CRI ≥ 70 2,700 K CRI ≥ 70 3,000 K CRI ≥ 80 4,000 K CRI ≥ 70 CRI ≥ 80 on request

Performance

Optics	AH02	AP06	AP07	AS07
MacAdam ellipses (SDCM)	≤ 5 SDCM			

Model	IDstandard	IDstandard	IDstandard
Light units	1	2	4
Luminous flux [lm]	51–162	121–370	242–640

Equipment variations

